

21-E-650B/C, 651B/C

4

2022

4.2.2

4.2.3

4.3

4.3.1

4.3.2

4.3.3

4.3.4

15S

200mm

4.3.5

GB/T9948-2013

Đ

19*2.1mm

4.3.6 Q245R Q345R

GB713-2014

4.3.7

NB/T47008 47010-2017

4.3.8

16Mn

4.3.9

Q235-A. F

4.3.10

4.3.11

GB/T 151-2014

GB/T

150-2011

4.3.12

4.3.13

NB/T47013.1 6-2015

4.3.14

4.3.15

4.3.16

4.3.17

4.3.18

GB/T150-2014 8.13

4.3.19

4.3.20

2

4.3.21

1mm

4.3.22

4± 1mm

4.3.23

4.3.24

TSG 21-2016

5.5

5.6

5.7

5.7.1

R W H

3

1

5.7.2

()

5.7.3

			H	W	R	
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						

6.1

6.2

6.3

6.4

6.5

6.6

6.7

6.8

		/		/		
A02		4/1	1			
A03		4/1	2			
A04		4/1	1			
A05		4/1	2			

*

B01

E01				8/1		TSG 21-2016
-----	--	--	--	-----	--	----------------

E02 1-2016



8.5

1 2

8

48

9.

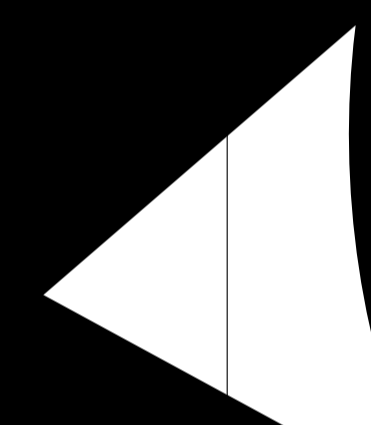

1

2

3

4

5

6

7

8

A

A

B

B

C

CURVA S4 ELBOW S4 1 S ITN Ø2034 ASTM SA 240R1

JACKSCREW 4 M16 L=130 PL TH ASTM SA 516 GR 60

TIRANTI TIERODS 8 PL THK=8 L=780 x 580 M SA 516 GR 60

DIAFRAMMI BAFFLE 8 PL THK=8 L=780 x 580 M SA 516 GR 60


55

53

52

EARTHING LUG 2 PL THK=10 L=110 x 60 SA 516 GR 60

TUBES

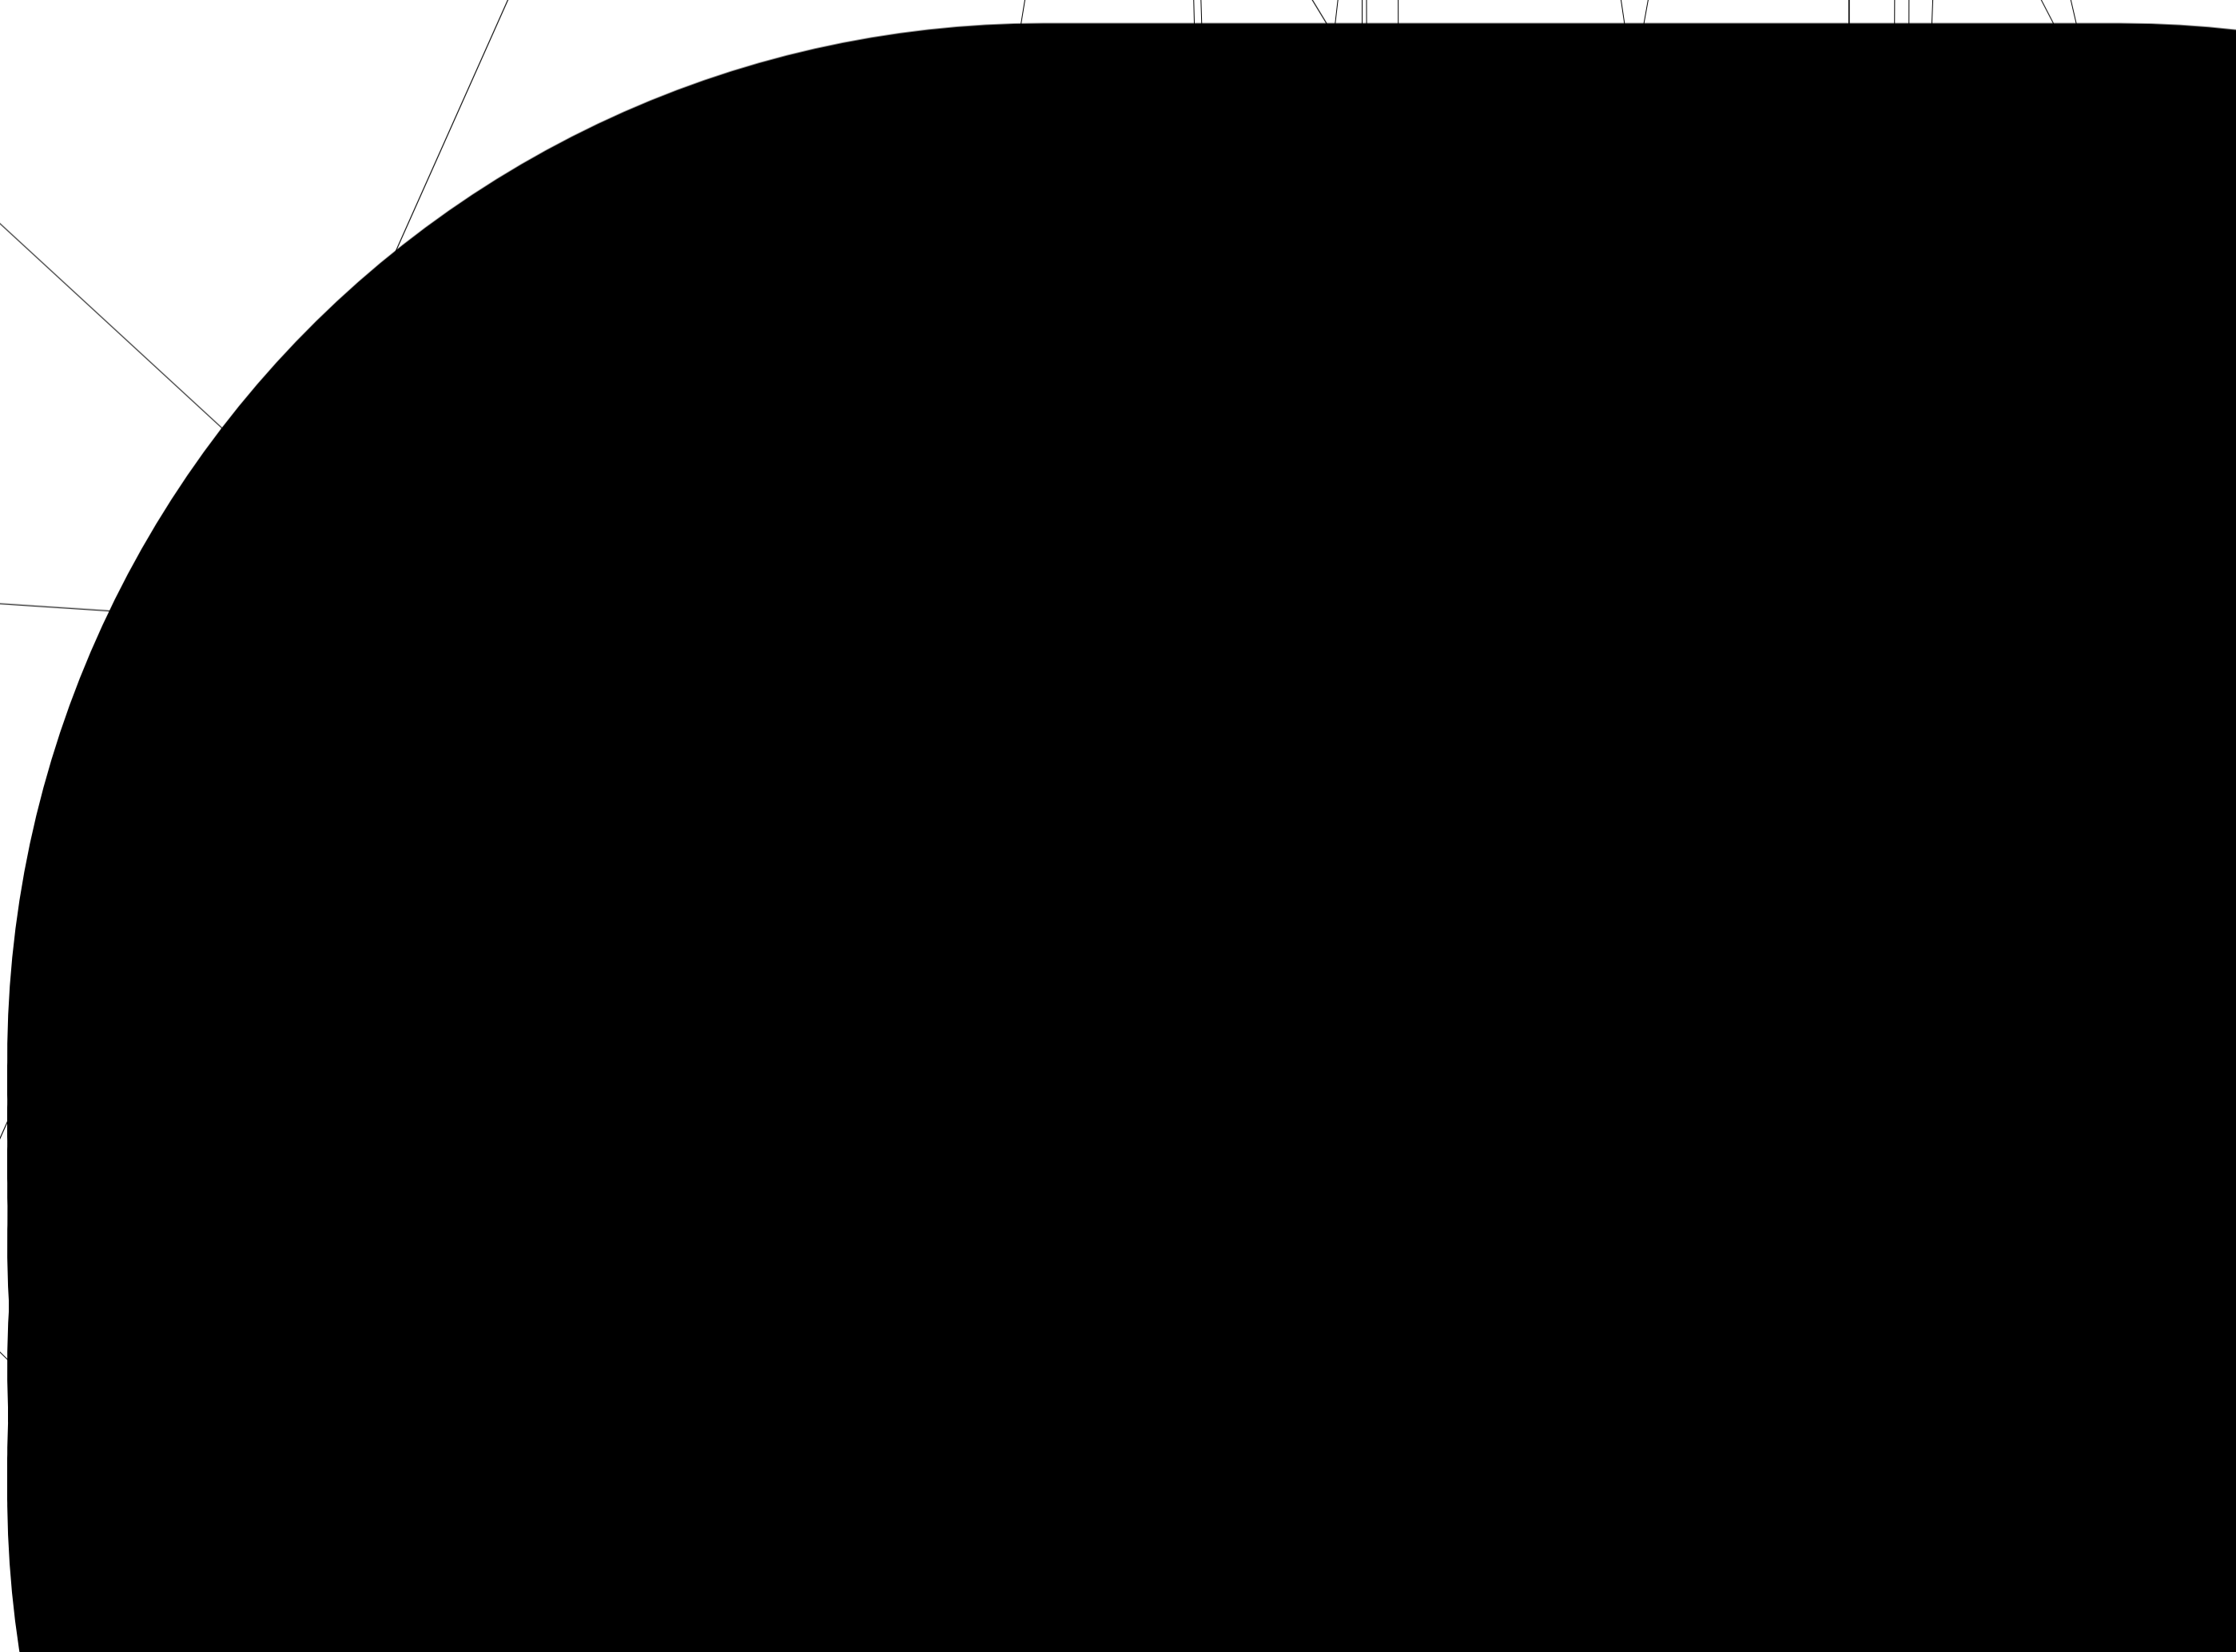

4	5	6

